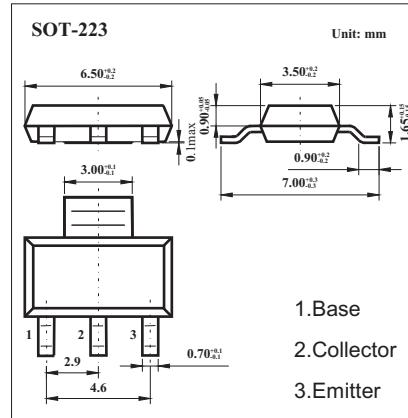


PNP Medium Power Transistors

KCP53-16

■ Features

- For AF driver and output stages
- High collector current
- Low collector-emitter saturation voltage



■ Absolute Maximum Ratings Ta = 25°C

| Parameter | Symbol | Rating | Unit |
|---|------------------|-------------|------|
| Collector-base voltage (open emitter) | V _{CBO} | -100 | V |
| Collector-emitter voltage(open base) | V _{CEO} | -80 | V |
| Emitter-base voltage(open collector) | V _{EBO} | -5 | V |
| Collector current | I _C | -1 | A |
| power dissipation | P _D | 1.5 | W |
| thermal resistance from junction to ambient | R _{θJA} | 83.3 | °C/W |
| Junction temperature | T _j | 150 | °C |
| Storage temperature | T _{stg} | -65 to +150 | °C |

■ Electrical Characteristics Ta = 25°C

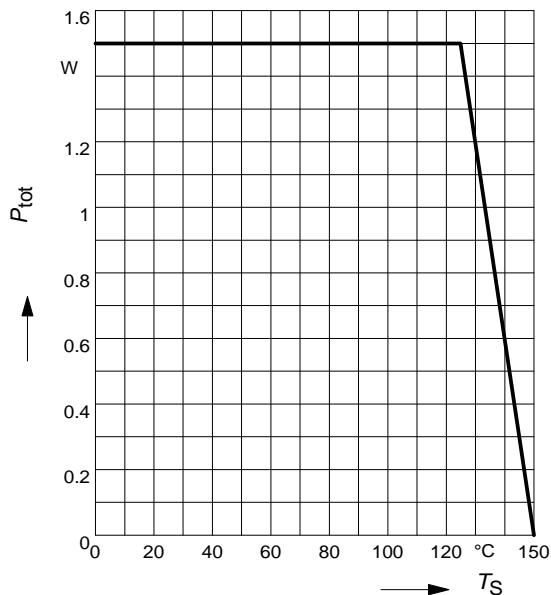
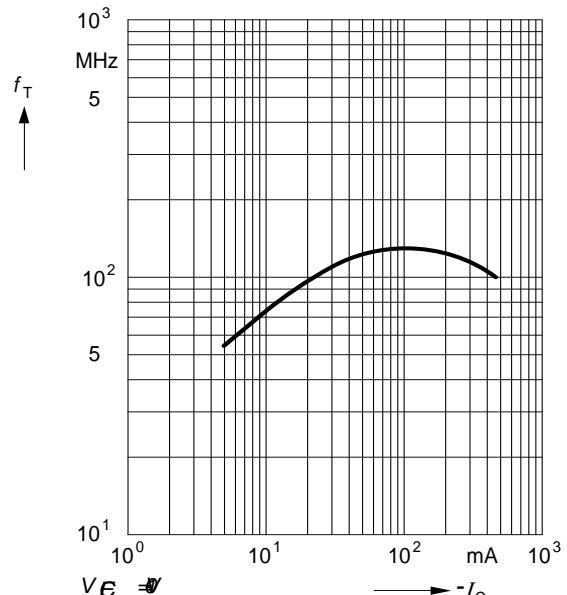
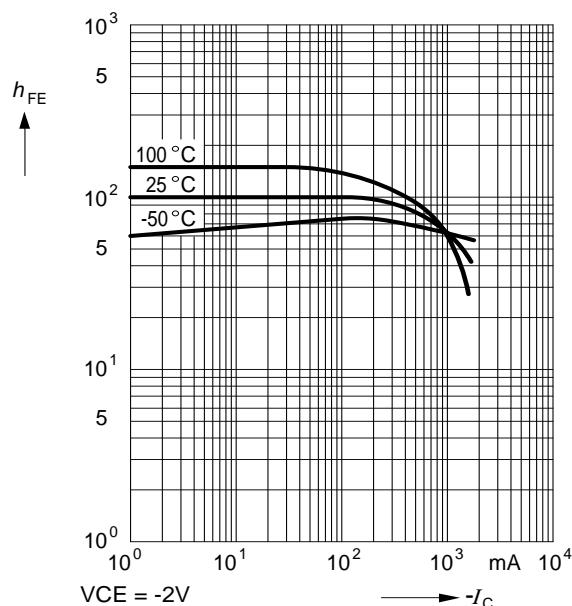
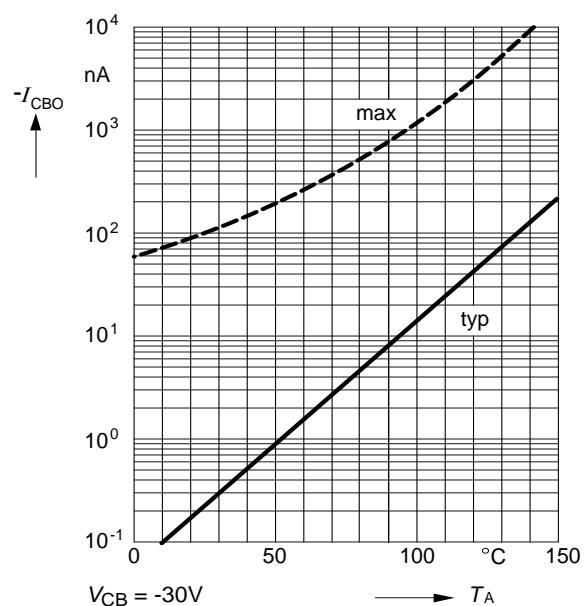
| Parameter | Symbol | Test conditions | Min | Typ | Max | Unit |
|--------------------------------------|----------------------|---|------|-----|------|------|
| Collector-base breakdown voltage | V _{(BR)CBO} | I _C =- 0.1mA, I _E =0 | -100 | | | V |
| Collector-emitter breakdown voltage | V _{(BR)CEO} | I _C = -10mA, I _B =0 | -80 | | | V |
| Base-emitter breakdown voltage | V _{(BR)EBO} | I _C = -10μA, I _E =0 | -5 | | | V |
| Collector cutoff current | I _{CBO} | V _{CB} = -30 V, I _E = 0 | | | -100 | nA |
| Emitter cutoff current | I _{EBO} | V _{EB} = -5 V, I _C = 0 | | | -100 | nA |
| DC current gain | h _{FE} | I _C = -5 mA; V _{CE} = -2 V | 25 | | | |
| | | I _C = -150 mA; V _{CE} = -2 V | 100 | | 250 | |
| | | I _C = -500 mA; V _{CE} = -2 V | 25 | | | |
| Collector-emitter saturation voltage | V _{CE(sat)} | I _C = -500 mA; I _B = -50 mA | | | -0.5 | V |
| Base to emitter voltage | V _{BE} | I _C = -500 mA; V _{CE} = -2 V | | | -1 | V |
| Transition frequency | f _T | I _C = -50 mA; V _{CE} = -10 V; f = 100 MHz | 100 | | | MHz |

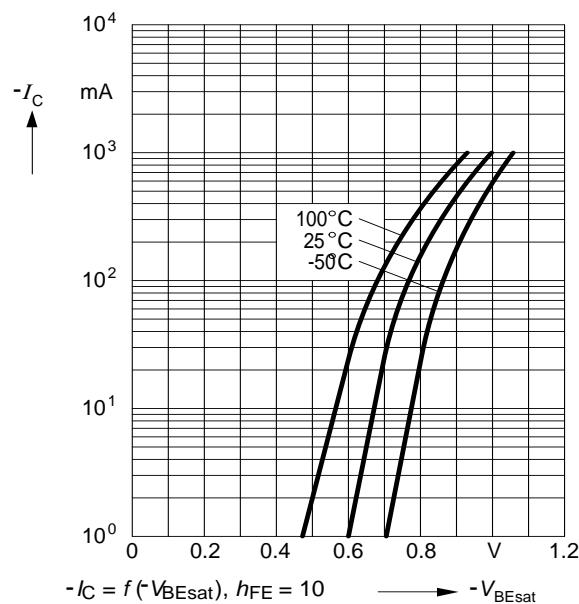
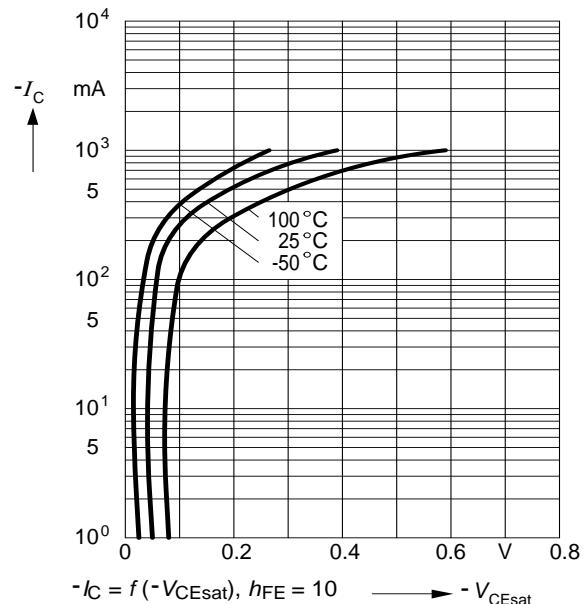
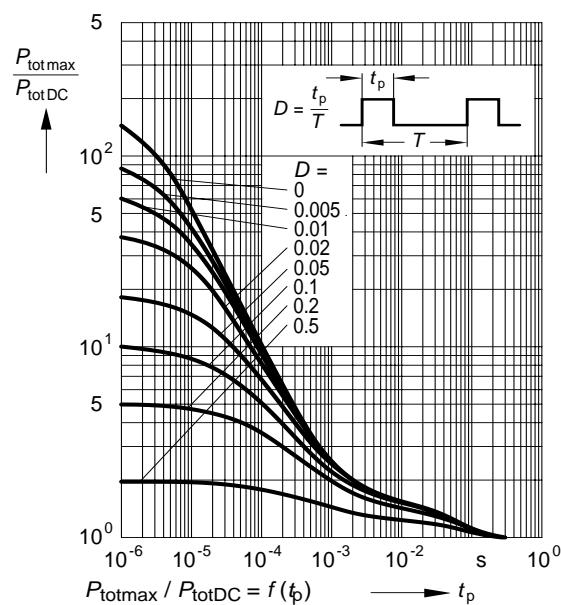
■ Marking

| | |
|---------|-------|
| Marking | BCP53 |
|---------|-------|

KCP53-16

■ Typical Characteristics

**Total power dissipation** $P_{\text{tot}} = f(T_S)$ **Transition frequency** $f_T = f(-I_C)$ **DC current gain** $h_{\text{FE}} = f(-I_C)$ **Collector cutoff current** $I_{\text{CBO}} = f(T_A)$

KCP53-16**Base-emitter saturation voltage****Collector-emitter saturation voltage****Permissible pulse load**