
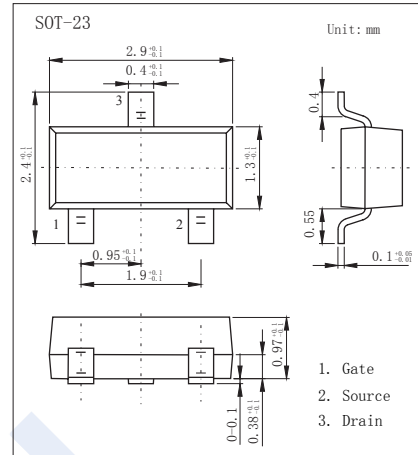


N-Channel MOSFET

2SK1581

Features

- $V_{DS} (V) = 16V$
- $I_D = 0.2 A$
- $R_{DS(ON)} < 5 \Omega$ ($V_{GS} = 2.5V$)
- $R_{DS(ON)} < 3 \Omega$ ($V_{GS} = 4V$)



Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	16	V
Gate-Source Voltage	V_{GS}	± 16	
Continuous Drain Current	I_D	200	mA
Pulsed Drain Current (Note.1)	I_{DM}	400	
Power Dissipation $T_a = 25^\circ C$	P_D	200	mW
Junction Temperature	T_J	150	$^\circ C$
Operating Temperature	T_{opt}	-55 to 80	
Storage Temperature Range	T_{stg}	-55 to 150	

Note.1: $PW \leq 10ms, Duty\ Cycle \leq 50\%$

Electrical Characteristics $T_a = 25^\circ C$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	V_{DSS}	$I_D=250 \mu A, V_{GS}=0V$	16			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=16V, V_{GS}=0V$			1	μA
Gate-Body Leakage Current	I_{GSS}	$V_{DS}=0V, V_{GS}=\pm 3V$			± 5	μA
Gate Cut-off Voltage	$V_{GS(off)}$	$V_{DS}=3V, I_D=10\mu A$	0.8		1.6	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=2.5V, I_D=1m A$			5	Ω
		$V_{GS}=4V, I_D=1m A$			3	
Forward Transconductance	g_{FS}	$V_{DS}=3V, I_D=10m A$	20	70		mS
Input Capacitance	C_{iss}	$V_{GS}=0V, V_{DS}=3V, f=1MHz$		27		μF
Output Capacitance	C_{oss}			37		
Reverse Transfer Capacitance	C_{rss}			8		
Turn-On DelayTime	$t_{d(on)}$	$V_{GS(on)}=3V, V_{DS}=3V, I_D=10mA, R_L=300 \Omega, R_G=10 \Omega$		100		ns
Turn-On Rise Time	t_r			300		
Turn-Off DelayTime	$t_{d(off)}$			210		
Turn-Off Fall Time	t_f			240		

Marking


Marking	G14

N-Channel MOSFET


2SK1581

Typical Characteristics


DERATING FACTOR OF FORWARD BIAS SAFE OPERATING AREA

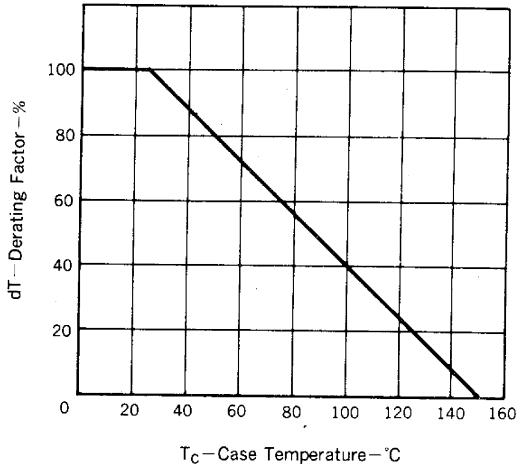


TOTAL POWER DISSIPATION vs. AMBIENT TEMPERATURE

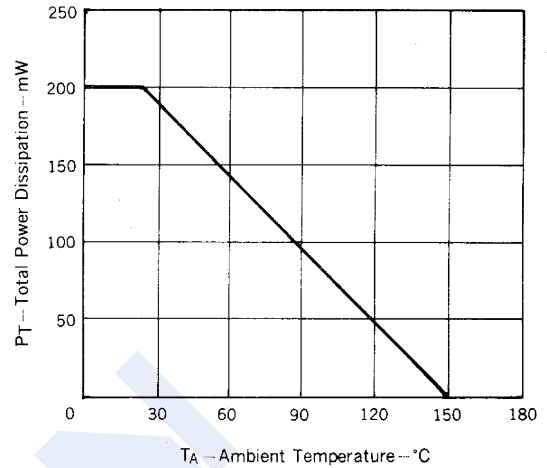


DRAIN CURRENT vs. DRAIN TO SOURCE VOLTAGE

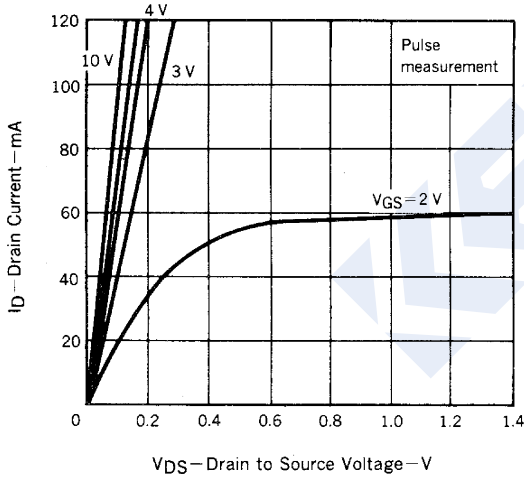


TRANSFER CHARACTERISTICS

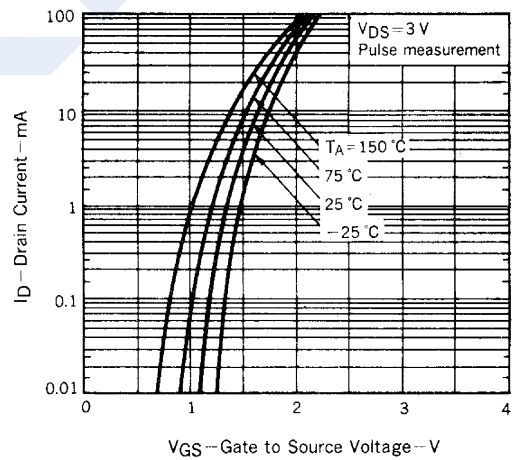

GATE TO SOURCE CUTOFF VOLTAGE vs. CHANNEL TEMPERATURE

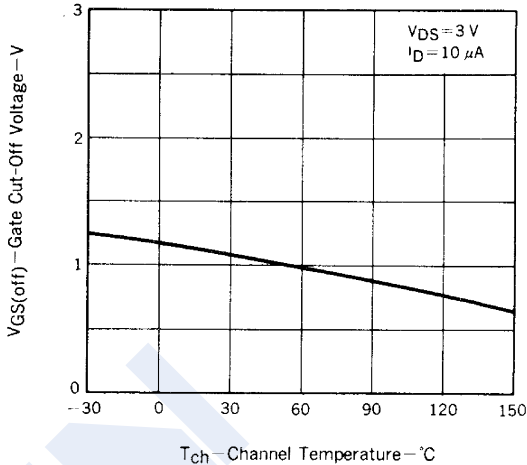

FORWARD TRANSFER ADMITTANCE vs. DRAIN CURRENT

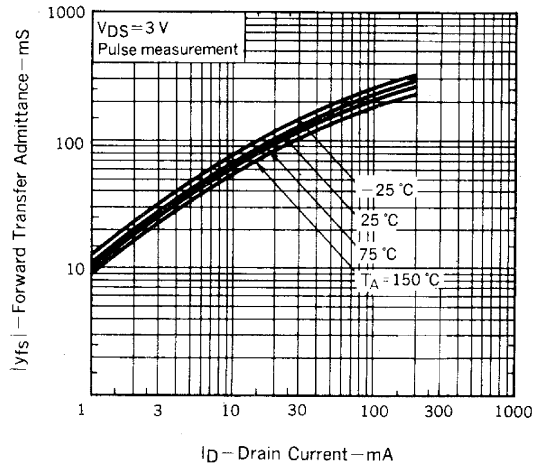

N-Channel MOSFET 2SK1581

Typical Characteristics

