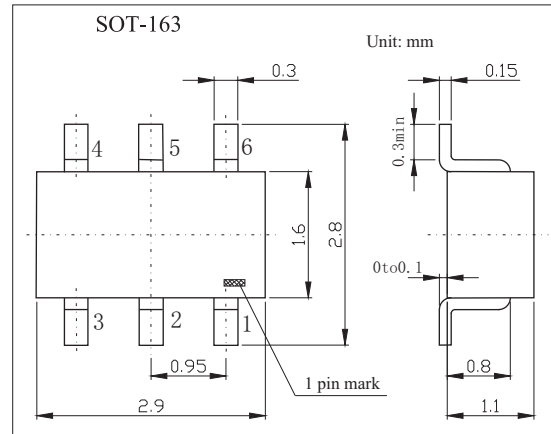



General purpose (Dual Digital Transistors)

IMH1A

■ Features

- Input voltage: $V_{in}=40V$
- Output current: $I_o=30mA$

■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Supply voltage	V_{CC}	50	V
Input voltage	V_{IN}	40	V
		-10	
Output current	I_o	30	mA
Collector current	$I_{C(MAX)}$	100	mA
Power dissipation(Total)	P_d	300	mW
Operating and Storage and Temperature Range	T_j, T_{STG}	-55 to +150	$^\circ C$

■ Electrical Characteristics $T_a = 25^\circ C$

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Input voltage	V_I (off)	$V_{CC}=5V, I_o=100\mu A$			0.5	V
	V_I (on)	$V_o=0.2V, I_o=5mA$	3			V
Output voltage	V_o (on)	$I_o=10mA, I_i=0.5mA$			0.3	V
Input current	I_i	$V_i=5V$			0.36	mA
Output current	I_o (off)	$V_{CC}=50V, V_i=0V$			0.5	μA
DC current gain	G_I	$V_o=5V, I_o=5mA$	56			
Transition frequency	f_T	$V_{CE}=10V, I_E = -5mA, f=100MHz$		250		MHz
Input resistance	R_1		15.4	22	28.6	k Ω
Resistance ratio	R_2 / R_1		0.8	1	1.2	

■ Marking

Marking	H1
---------	----

IMH1A

Typical Characteristics

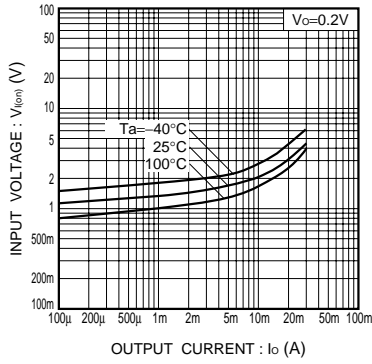


Fig.1 Input voltage vs. output current (ON characteristics)

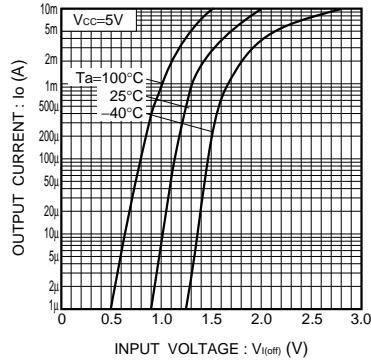


Fig.2 Output current vs. input voltage (OFF characteristics)

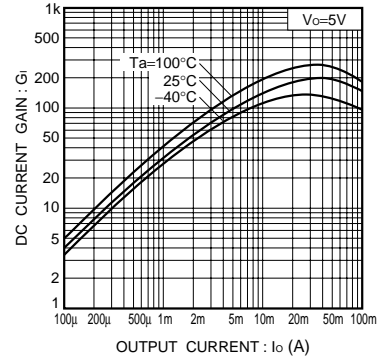


Fig.3 DC current gain vs. output current

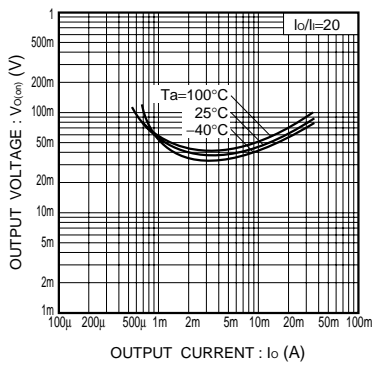


Fig.4 Output voltage vs. output current